




- + Housse amovible
- + Large choix de couleurs et finitions
- + Kit mixte électrique sur demande
- + Raccordements centrales avec entraxe de 50 mm sur demande

- + Removable cover
- + Wide choice of colors and finishes
- + Electrical mixed kit on request
- + Central connections with 50 mm spacing on request

Schéma de montage Assembly scheme

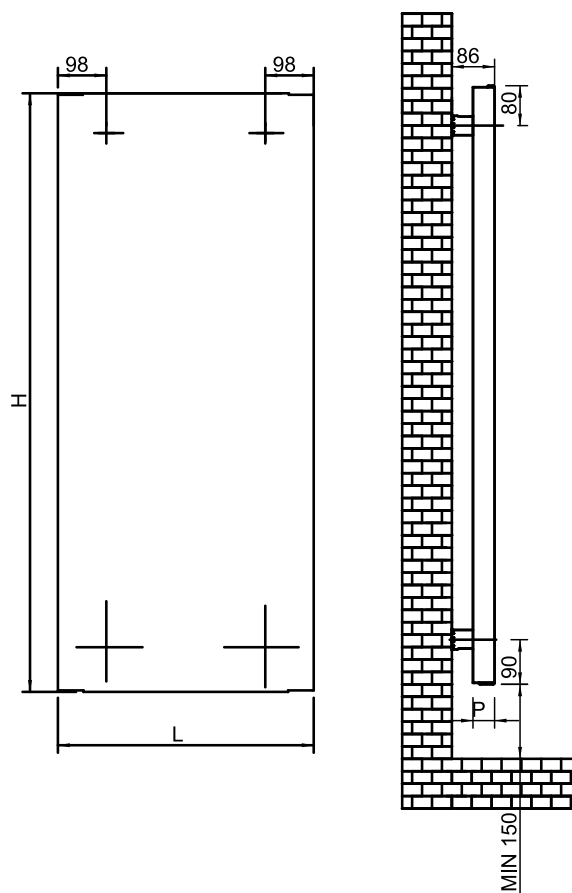

CARACTÉRISTIQUES TECHNIQUES

- Entièrement fabriqué en acier
- Collecteurs latéraux en forme de 40 x 30 mm
- La distance totale du mur au radiateur installé est 86mm
- Housse amovible sans raccordement hydraulique
- Deux couches peinture: anaphorèse et revêtement en poudre époxy-polyester
- Kit de fixation inclus
- Fixation réglable au mur
- Pression d'épreuve: 7,8 bars.

TECHNICAL CHARACTERISTICS

- Made entirely in steel
- 40 x 30 mm shaped side manifolds
- The total distance from the wall to the installed radiator is 86mm
- Removable "Cover" without hydraulic connection
- Two coats of paint anaphoresis and epoxy-polyester powder
- Fixing kit included
- Adjustable fixing from the wall
- Test pressure: 7.8 bar.

Modèle - Model	Code Code	Hauteur Height (mm)	Largeur Width (mm)	Profond. Depth (mm)	Entraxe Distance (mm)	Poids Weight (kg)	Puissance Power ΔT 50° C	Puissance Power ΔT 30° C
PIERROT (Blanc- White)	TGC395000	1904	515	45	450	25	700	382
	TGC396000	1904	615	45	550	31,5	826	451
PIERROT (Ral)	TGC39500_	1904	515	45	450	25	700	382
	TGC39600_	1904	615	45	550	31,5	826	451
PIERROT (Couleurs spéciales- Special colors)	TGC39500*	1904	515	45	450	25	700	382
	TGC39600*	1904	615	45	550	31,5	826	451