

Cromo DD Smarty droit - Straight

ELECTRIC





- Nouveau boîtier Smarty;
- Thermostat positionnable soit à gauche soit à droite;
- Ligne classique et essentielle;
- Chromage par électrodéposition.

- New Smarty control;
- Thermostat positionnable either a left to right collector;
- Classic and essential lines;
- Chrome plating by electroplating.

CARACTÉRISTIQUES TECHNIQUES

- thermostat électronique digital;
- classe II ou classe I;
- IP44;
- fil pilote 6 ordres;
- chromage.

Caractéristiques techniques boîtier Smarty

Modes de fonctionnement: Confort, Forçage, Veille, Minuterie 12, Hors gel, Minuterie 24, marche forcée 1 ou 2 heures, verrouillage clavier (sécurité enfant), Fil Pilote.


TECHNICAL DATA

- electronic digital control;
- class II or classe I;
- IP44;
- pilot wire 6 orders;
- chromium.

Technical data electronic control

Operation modes: Comfort, Boost, Stand by, Timer12, Timer24 anti-ice, "forced operation" 1h or 2h, "key lock" in the presence of children, Pilot Wire.

SCHEMA DE MONTAGE MOUNTING DIAGRAM

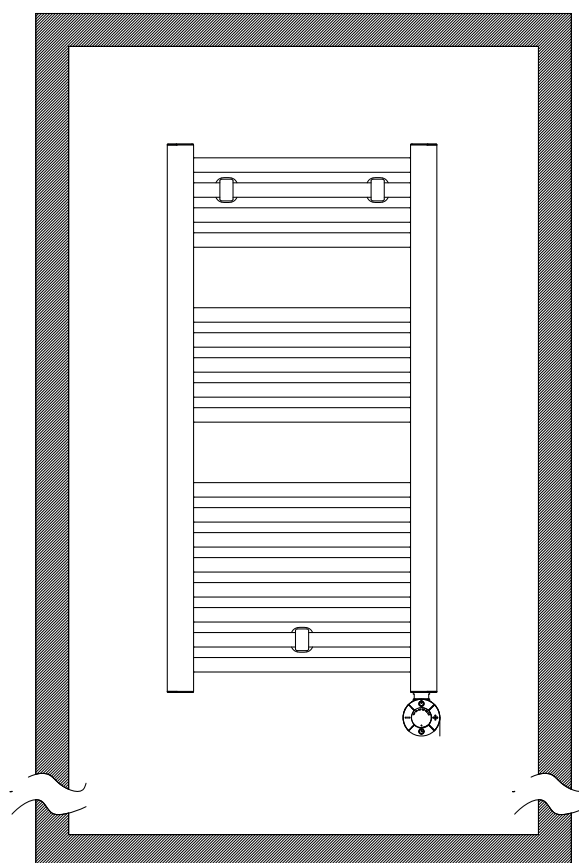

version chromée -chromed version

Modèle Model	Hauteur Height (mm)	Largeur Width (mm)	Profondeur Depth (mm)	Poids Weight Kg	Puissance Power W	CL. I a/prise Shuko w/Shuko plug	CL. II avec fil pilote with pilote wire
300W destra- derecha	1280	500	50	14	300	RFD20500SFU	RFD20500SFP
500W destra- derecha	1680	500	50	19	500	RFD27500SFU	RFD27500SFP
700W destra- derecha	1860	500	50	23	700	RFD31500SFU	RFD31500SFP
300W sinistra-izquierda	1280	500	50	14	300	RFD20500SSU	RFD20500SSP
500W sinistra-izquierda	1680	500	50	19	500	RFD27500SSU	RFD27500SSP
700W sinistra-izquierda	1860	500	50	23	700	RFD31500SSU	RFD31500SSP